


ANDY JACKSON AIRPARK- CRESTLINE SOARING SOCIETY






Perspective View
SIMILAR NTS




E-W Section/S.Elevation
SCALE: 1/4"=1'-0"



Open to Sky

E. Stairs

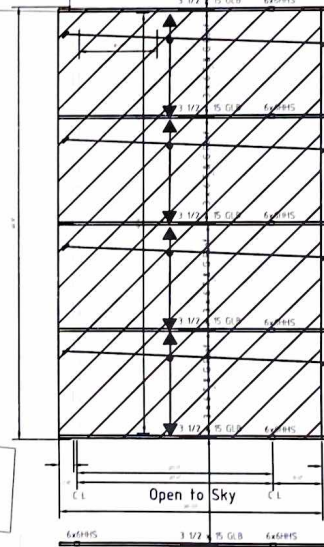


Landing Zone




Open to Sky

Roof Framing/Roof Plan
SCALE: 1/4"=1'-0"

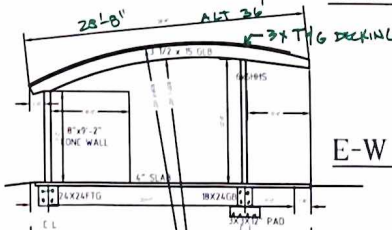

E-W Section/S.Elevation
SCALE: 1/4"=1'-0"

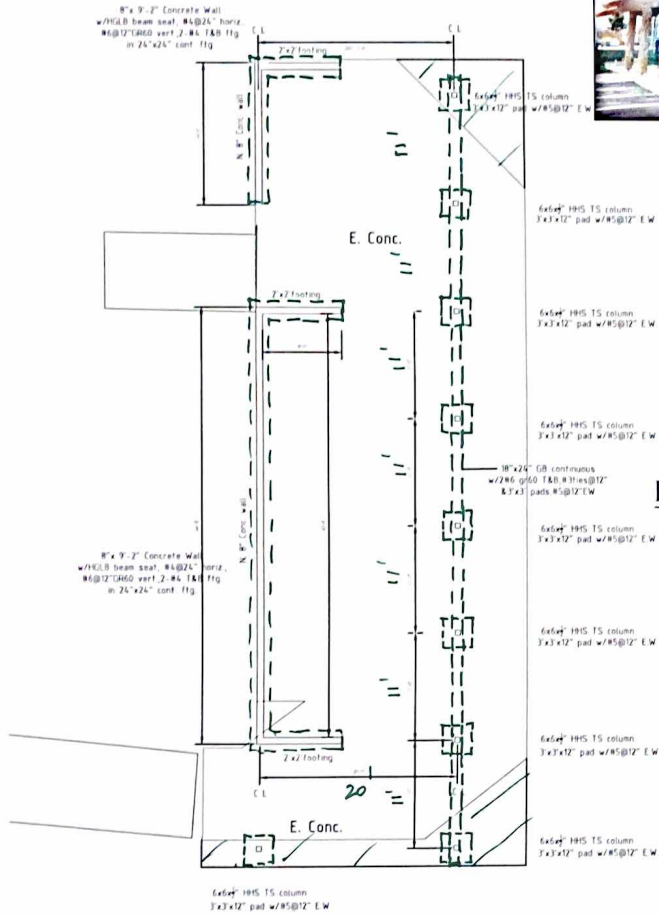

Foundation Plan
SCALE: 1/4"=1'-0"

Parking Lot

E. Slope

E. Stairs

TKG WEST INC.
ARCHITECTURAL REPRESENTATION, INNOVATION
8175 Aster Road
Oak Hills, CA 92244
O 916 497 6641 F 916 788 5800
jajpal@tkgwest.com

Andy Jackson Airpark
5500 Ben Canyon Road
San Bernardino, CA 92407

REVISIONS	
DATE	
BY	
REVISIONS	
DATE	
BY	
REVISIONS	
DATE	
BY	



V.3

	A	B	C	D	E	F
1	AJX Shade Structure	V3				
2	5500 Ben Canyon Rd.					
3	San Bernardino, CA					
4	CATEGORY	Quantity	Cost of Matl.	Labor & donated	Alternates	Comments/vendors
5						
6	Architect, Engineer			\$ 5,000		All design & engineering
7						
8	GENERAL CONDITIONS		\$ 1,000			for free labor
9						
10	DEMOLITION		\$ 1,000	\$ 350		demo, sawcut
11						
12						
13	EXCAVATION/HAULING		\$ 1,400	\$ 500		haul off
14						
15	FOUNDATIONS					footings, pads, grade beams, walls
16	Concrete matl.		\$ 15,000			wing walls, rebar, forms,pump,slab
17	Concrete labor			\$ 7,500		
18	Rebar install			\$ 1,500		Camblin Steel, Bloomington, CA
19						
20						
21	FRAMING					
22	GLB's -8	8	\$ 12,272			Miller Whlsl, Phoenix
23	freight		700			
24	Paint/Stain glb		\$ 500			
25	Rafters 2x8	150x12ft, 2666bf	\$ 3,375			Jones Lumber Lynwood, CA
26	CDX plywd 5/8	60 sheets	\$ 3,300			
27	Hardware		\$ 1,000			HDS White Cap, Riverside, CA
28	Framing Labor			\$ 9,000		
29					\$ 4,000	Framing to replace Container
30						Steel doors, finishes, lighting, misc.
31				\$ 2,000		Donated labor/matl.
32	STEEL					
33	Structural Steel	9cols 6x6x1/2	\$ 8,820	\$ 600		base pl, saddles, caps, welding, SS bolts
34						Tubular Steel Inc. Rialto, CA
35						
36	ROOFING	16	\$ 2,800	\$ 400		Membrane roof covering
37						
38						
39	PAINTING/STAINING					
40						
41	ELECTRICAL					
42	low voltage			\$ 500		
43	AC plugs lighting		\$ 500	\$ 1,500		
44	Solar PV			donated		PV system TBD
45						
46	PLUMBING					
47	Rough					
48	Finish					
49				donated		Solar Hot Water TBD
50	SPECIALTIES					
51	Windsock pole					
52	New 40' Container		\$ 6,000			
53						
54	ADDITIVE ALTERNATE;					
55	ROOF DECKING	1680 sf			\$ 2,175.00	3X6 T&G vs Rafters & plywd
56						
57						
58	TOTALS		\$ 57,667	\$ 23,850		
59						
60						